

10-25kW Three-phase Hybrid All-in-one RESS


A Series H10/15/20/25T

A10000T/A15000T/A20000T/A25000T
+ B8900M-HA

A10000T-E/A15000T-E/A20000T-E/
A25000T-E+ B8900M-HA

10kW/15kW/20kW/25kW
8.9kWh-26.7kWh / 8.9kwh-160.2kWh

- 4 MPPT inputs, 120% Oversized PV input, Max 30 kW
- Inverter parallel function, up to 6 units, Max. output power up to 150kW, massive energy storage of 160.2kWh
- Stackable integrated design, plug & play, no additional cable, saving 50% installation time
- 120~600V ultra-wide battery voltage range, realizing 20KW charging & discharging capacity of one way battery
- Support 100% three-phase unbalanced output
- Built-in change over switch, allows manual selection between Backup mode and By-pass mode for backup loads.
- Backup load transfer time ≤10ms
- The phase sequence does not matter, ensuring easier and more flexible installation

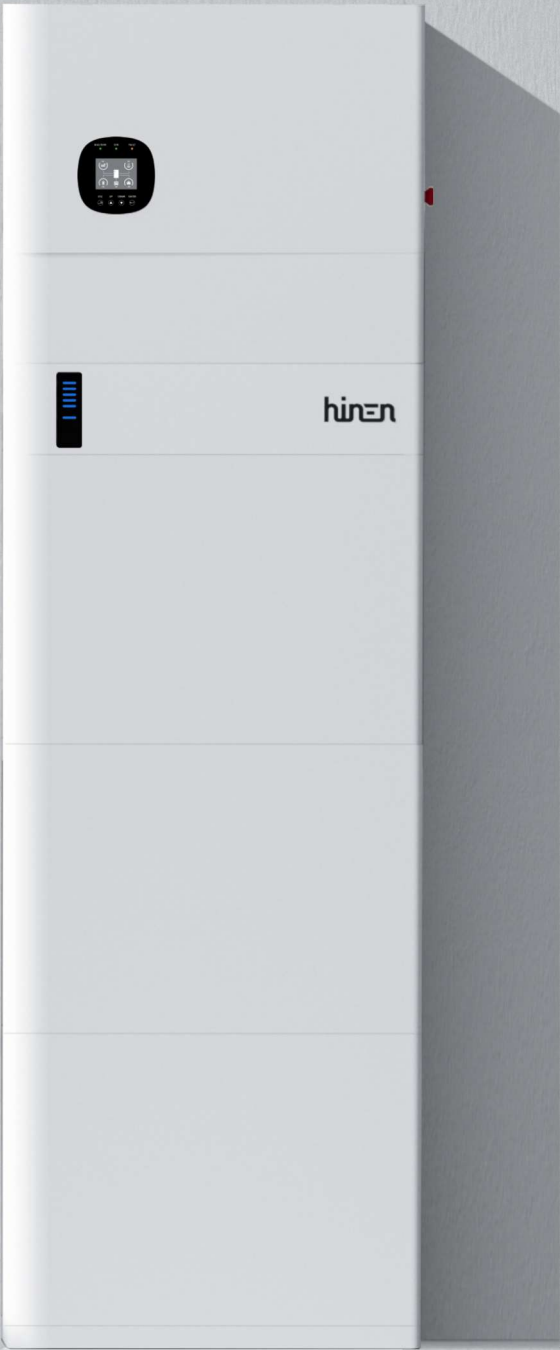

A better world
powered by you

Technical Specification

Model	A10000T A10000T-E	A15000T A15000T-E	A20000T A20000T-E	A25000T A25000T-E
PV Input Specification				
Recommended max. PV input power(W)	30000	30000	30000	30000
Max. PV input voltage(V)	1000			
Start Voltage(V)	120			
Rated PV input voltage(V)	600			
MPPT voltage range(V)	140–950			
No. of independent MPPT inputs	4	4	4	4
No. of PV strings per MPPT	1/1/1/1	1/1/1/1	1/1/1/1	1/1/1/1
Max. input current per string (A)	16 / 16 / 16 / 16	16 / 16 / 16 / 16	16 / 16 / 16 / 16	16 / 16 / 16 / 16
Max. short-circuit current(A)	22 / 22 / 22 / 22	22 / 22 / 22 / 22	22 / 22 / 22 / 22	22 / 22 / 22 / 22
Battery Specification				
Battery type	LiFePO4			
Battery voltage(V)	120–600			
Max charge / discharge current(A)	45 / 45			
Max charge / discharge power(W)	20000/20000	20000/20000	20000/20000	20000 / 20000
Communication	CAN			
Charging strategy	BMS instructions			
Battery expansion	1~3 series-connected 8.9kWh high-voltage battery modules per cluster			
Inverter Expansion	Support 6 inverters parallel			
Grid Port Specification				
Max AC input apparent power(VA)	10000	15000	20000	20000
Max. AC input current(A)	30.4	30.4	30.4	38
Max AC output apparent power(VA)	10000	15000	20000	25000
Rated AC output power(W)	10000	15000	20000	25000
Max. AC output current(A)	15.2	22.8	30.4	38
Rated AC output current(A)	14.5	21.8	29	36.3
Rated AC voltage	400 / 230, 3L/N/PE			
Rated grid frequency	50/60			
THDI @Full load	< 3%			
Power factor	> 0.99(0.8 leading – 0.8 lagging)			

Technical Specification

Model	A10000T A10000T-E	A15000T A15000T-E	A20000T A20000T-E	A25000T A25000T-E
Backup Port Specification				
Max AC output apparent power(VA)	10000	15000	20000	20000
Rated AC output power(W)	10000	15000	20000	20000
Peak AC output power(W)	20000	20000	20000	20000
Max AC output current(A)	29Aa.C.	29Aa.C.	29Aa.C.	29Aa.C.
AC nominal voltage*(V)	400Va.c./230Va.c.,3L/N/PE			
AC nominal frequency*(Hz)	50 / 60			
THDV @Linear load	< 3%			
Backup switch time(ms)	< 10			
Efficiency				
Max efficiency(%)	98.0	98.0	98.0	98.0
European efficiency(%)	97.4	97.4	97.4	97.4
Protection & Function				
DC switch	Yes			
PV reverse polarity protection	Yes			
BAT reverse protection	Yes			
Output AC overcurrent protection	Yes			
Output AC overvoltage Protection	Yes			
Anti-islanding protection	Yes			
Residual current detection	Yes			
Insulation resistance detection	Yes			
Active anti-islanding method	Yes (Frequency Shift)			
Over Voltage Category	DC type II / AC type III			
General Information				
Topology (solar / battery)	Transformerless / Transformerless			
Degree of protection	IP65			
Dimensions* (W * H * D)(mm)	730*637*180(±4)			
Weight*(kg)	59(±3)			

Technical Specification

Model	A10000T A10000T-E	A15000T A15000T-E	A20000T A20000T-E	A25000T A25000T-E
Installation type	Floor stand			
Operating ambient temperature(°C)	-25–60(>45°C derating)			
Relative humidity (Non-condensing)(%)	0–100			
Cooling method	Fan cooling			
Noise(MAX)(dB)	< 45			
Max. operating altitude(m)	3000			
Display	LCD+APP			
Monitor	RS485 / WIFI			
DC connection	MC4			
AC connection	5P Connector			
Warranty*	10 Years			
Certification & Standard				
Certification	CB, CE, UKCA, SONCAP, RCM, ROHS			
Standard	IEC/EN 62109-1, IEC/EN 62109-2, IEC 62619, IEC 60730-1 Appendix H,IEC/EN 62368-1, EN IEC 61000-6-1/3, IEC 61 000-2-2, CISPR 11, IEC 60529, IEC 60068-2-52,AS/NZS 4777.2, IEC 60947.1, AS 60947.3, VDE-AR-N 4105, EN 50549-1,G98, G99, UN 38.3, MSDS			

Dimensions (W * H * D)*:Total dimension of inverter and control box.
Weight*:Total weight of inverter and control box.
Warranty*:Refer to the product warranty terms for details.